




MC 446

E-NR: 6332817

Magnetic Contact,
Surface mount, NC/NO

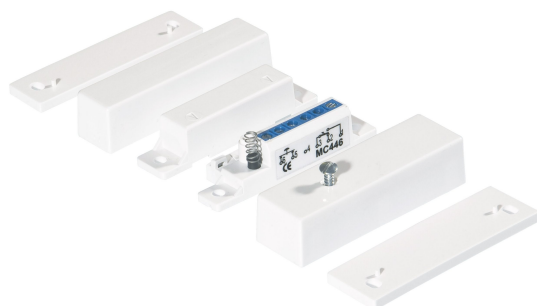

MC 446 is a surface mount magnetic contact with change-over NC/NO function and with 6 screw connections. It can be used in both in alarm and access control systems for monitoring e.g. doors and windows against unauthorised opening.

It has screw terminals with wire protection and a sabotage contact. Enclosed are plastic spacers for installation on steel.

The contact can be supplemented with different accessories such as brackets and extra strong magnets.

TECHNICAL DETAILS

Approvals	Class 2, class II, EN 50131-2-6 Grade 2, F&P, FG, INCERT B-582-1002, SBSC 9-212
Contact rating	48 VDC / 250 mA / 5 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 43
Make distance (wood) mm	26
Make distance (steel) mm	14
Contact dimensions (L x W x H) mm	65 x 20 x 15
Magnet dimensions (L x W x H) mm	65 x 14 x 10
Grade	2
Product type	Detectors
Environment	Indoor
Product group	Magnetic contact
Product feature	Surface-mounted
Security certification and approval schemes	EN, F&P, FG, INCERT, SBSC
Security class	2



Environmental class II

ORDER INFORMATION

Model	E-NR	Description
MC 446	6332817	Magnetic contact, change-over, surface mount

SCHEMATICS

